


ISI 型 ロッドシール専用パッキン (一体溝装着可)

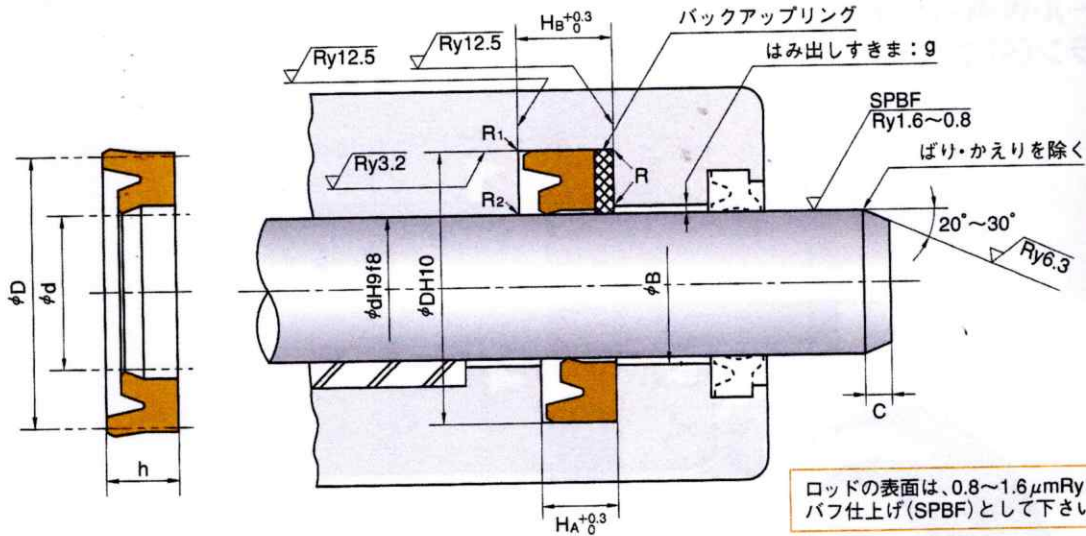

ロッドの表面は、0.8~1.6μmRy (0.2~
バフ仕上げ(SPBF)として下さい。

パッキン呼び寸法			装着部寸法							
d	D	h	φd	φD	HA	HB	C			
18	26	5	18	26	5.7	7.7	2			
20	28	5	20	28						
22.4	30	5	22.4	30						
	30.4	5	22.4	30.4						
23.5	31.5	5	23.5	31.5						
25	33	5	25	33						
	35	5	25	35						
28	35.5	5	28	35.5						
	36	5	28	36						
30	40	6	30	40		7		10		
31.5	41.5	6	31.5	41.5						
35	45	6	35	45						
35.5	45	6	35.5	45						
	45.5	6	35.5	45.5						
40	50	6	40	50						
45	55	6	45	55						
	56	7	45	56	8		11			
50	60	6	50	60	7		10			
53	63	6	53	63						
55	65	6	55	65						
56	66	6	56	66						
60	70	6	60	70						
	71	7	60	71		8		11		
63	73	6	63	73						
65	75	6	65	75						
67	77	6	67	77						
70	80	6	70	80		7		10		
71	81	6	71	81						
75	85	6	75	85						
80	90	6	80	90						
85	100	9	85	100	10		13			
90	105	9	90	105						
95	110	9	95	110						
98	112	8.5	98	112					9.5	12.5
100	115	9	100	115					10	13
105	120	9	105	120						
106	120	8.5	106	120		9.5		12.5		
	121	9	106	121						
110	125	9	110	125		10		13		
112	125	9	112	125						