


フィールドクランプ用ホース金具

金具形状

SSF90

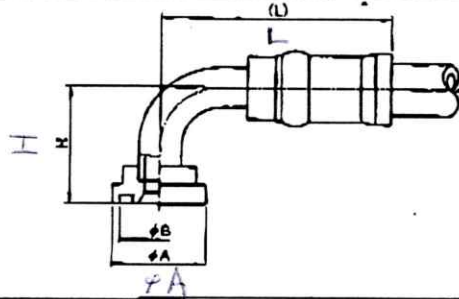

【特徴】

SAE J518 CODE61
標準圧カシリース
90° エルボ

ホース内径	金具品番	金具の寸法						その他	ユーザー
		口金サイズ	A	B	L	H			
12	KKCSSF90 12	-08	30.2	25.5	73	41.5			
	KKCSSF90 -1208	-12	38.1	31.8	73	42.5			
	KKCSSF90 12AAA	-08	30.2	25.5	73	90			
	KKCSSF90 12AAB	-08	30.2	25.5	72.5	130.5			
	KKCSSF90 12AAC	-12	38.1	31.8	73	54			川崎重工
	KKCSSF90 12AAD	-16	44.5	39.7	86	53.5			ホスサービス千葉
	KKCSSF90 12AAE	-16	44.5	39.7	84.5	46.5			川崎重工
	KKCSSF90 12AAF	-08	30.2	25.5	84.5	130.5	パイプ外径φ17.3		日立建機
	KKCSSF90 12AAG	-08	30.2	25.5	84.5	90	パイプ外径φ17.3		日立建機
	KKCSSF90 12AAH	-08	30.2	25.5	73.5	120			
	KKCSSF90 12AAJ	-08	30.2	25.5	80	90	12AAAのYTA2400加締め不可対応品		
	KKCSSF90 12AAK	-08	30.2	25.5	84.5	120		H18	
	KKCSSF90 12ABA	-08	30.2	25.5	84.5	60		H18	
KKCSSF90 12ABB	-12	38.1	31.8	84	90	パイプ外径φ21.7	2005/1/20		
GHCSSF90 12	-08	30.2	25.5	72.5	41				
15	GKCSSF90 -0810	-08	30.2	25.5	87	41.5			
	GKCSSF90 -1210	-12	38.1	31.8	98	53.5			
	GKCSSF90 15AAA	-08	30.2	25.5	86.5	130.5			
	GKCSSF90 15AAB	-16	44.5	39.7	98	53.5			
	GKCSSF90 15AAC	-12	38.1		98	53.5	Oリング選別し		川崎重工
	GKCSSF90 15AAD	-08	30.2	25.5	106.5	50	パイプ外径φ19		日立建機
	GKCSSF90 15AAE	-08	30.2	25.5	86.5	150.5			
	GKCSSF90 15AAF	-12	38.1	31.8	98	100			日立建機
	GKCSSF90 15AAG	-12	38.1	31.8	108	150			
	GKCSSF90 15AAH	-12	38.1	31.8	96	120			日立建機
	GKCSSF90 15AAJ	-08	30.2	25.5	98	150			
GKCSSF90 15AAK	-08	30.2	25.5	86.5	135				
GKCSSF90 15ABA	-08	30.2	25.5	98	100		H18		
19	GKCSSF90 19	-12	38.1	31.8	104.5	53.5			
	GKCSSF90 19J	-12	38.1	31.8	104.5	53.5			
	GKCSSF90 -0812	-08	30.2	25.5	93.5	41.5			
	GKCSSF90 -1612	-16	44.5	39.7	104.5	53.5			
	GKCSSF90 19AAA	-12	38.1	31.8	114.5	95.5			
	GKCSSF90 19AAB	-12	38.1	31.8	102.5	150			石川部品店
	GKCSSF90 19AAC	-12	38.1	31.8	102.5	105			石川部品店
	GKCSSF90 19AAD	-16	44.5	39.7	102.5	105			石川部品店
	GKCSSF90 19AAE	-20	50.8	44.5	103	67	NP仕様とOKH仕様が異なります		
	GKCSSF90 19AAF	-08	30.2	25.5	93.5	86			川崎重工
	GKCSSF90 19AAG	-08	30.2	25.5	93	130.5			川崎重工
	GKCSSF90 19AAH	-16	44.5	39.7	103	61			川崎重工
	GKCSSF90 19AAI	-12	38.1	31.8	103	85			川崎重工
	GKCSSF90 19AAJ	-12	38.1	31.8	103	75			川崎重工
	GKCSSF90 19AAK	-08	30.2	25.5	93	130	GKCSSF90 19AAGとダブリ		
	GKCSSF90 19ABA	-08	30.2	25.5	93	150.5			日立建機
	GKCSSF90 19ABB	-12	38.1	31.8	120	200	FT1207の場合金具選別入		住友建機
	GKCSSF90 19ABC	-08	30.2	25.5	93.5	89			日立建機
	GKCSSF90 19ABD	-16	44.5	39.7	102.5	150			住友建機
	GKCSSF90 19ABE	-08	30.2	25.5	105	130.5	パイプ外径φ17.3		日立建機
	GKCSSF90 19ABF	-20	50.8	44.5	112.5	60.5			
	GKCSSF90 19ABG	-12	38.1	31.8	102.5	100			日立建機
	GKCSSF90 19ABH	-12	38.1	31.8	114.5	127			新キャビナー三菱
GKCSSF90 19ABJ	-08	30.2	25.5	106	95.5	パイプ外径φ17.3		日立建機	
GKCSSF90 19ABK	-12	38.1	31.8	102.5	120				
GKCSSF90 19ACA	-20	50.8	44.5	113	110		H18		
GKCSSF90 19ACB	-08	30.2	25.5	105	85		H18		
GKCSSF90 19ACC	-24	60.3	53.9	112.5	80.5		H18		
GKCSSF90 19ACD	-12	38.1	31.8	102.5	175		H18		
GKCSSF90 19ACE	-20	50.8	44.5	103	67		H18		
GHCSSF90 19	-12	38.1	31.8	105	55				
GHCSSF90 -1612	-16	44.5	39.7	104.5	53.5			タムロック	
GFCSSF90 19	-12	38.1	31.8	106	55		H18		
GFCSSF90 19AAC	-12	38.1	31.8	102.5	105		H18		
GJCSSF90 19	-12	38.1	31.8	105	55		H18		