


ホース接続ユニオン (めす)

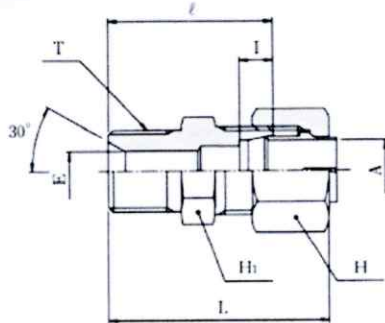

単位：mm

継手の呼び	適用管外径 A	(G) T	E	六角対辺		I	ℓ	手締め(約) L	重量 (kg)
				H ₁	H				
KUD08-020E	8	1/4	5.5	17	17	7	33	43.5	0.046
KUD08-030E	8	3/8	6	19	17	7	34	44.5	0.055
KUD10-020E	10	1/4	5.5	17	19	7	33	44.5	0.053
KUD10-030E	10	3/8	8	19	19	7	34	45.5	0.060
KUD10-040E	10	1/2	8	22	19	7	38	49.5	0.081
KUD12-020E	12	1/4	5.5	19	22	7	33	44.5	0.064
KUD12-030E	12	3/8	8	19	22	7	34	45.5	0.069
KUD12-040E	12	1/2	10	22	22	7	38	49.5	0.088
KUD15-030E	15	3/8	8	24	27	7.5	37	49.5	0.111
KUD15-040E	15	1/2	11	24	27	7.5	40	52.5	0.121
KUD16-030E	16	3/8	8	27	30	7.5	37	49.5	0.141
KUD16-040E	16	1/2	11	27	30	7.5	40	52.5	0.152
KUD18-040E	18	1/2	11	27	32	8	40	52.5	0.155
KUD20-060E	20	3/4	16	30	36	8	43	55.5	0.219
KUD22-040E	22	1/2	11	32	36	9	42	54.5	0.200
KUD22-060E	22	3/4	16	32	36	9	43	55.5	0.219
KUD25-060E	25	3/4	16	36	41	10	44	57.5	0.280
KUD25-080E	25	1	20	36	41	10	46	59.5	0.305
KUD28-060E	28	3/4	16	41	46	10	46	60	0.361
KUD28-080E	28	1	21.5	41	46	10	48	62	0.386
KUD30-060E	30	3/4	16	41	46	10	46	60.5	0.353
KUD30-080E	30	1	21.5	41	46	10	48	62.5	0.374
KUD35-100E	35	1 1/4	28	46	55	11	55	72.5	0.569

注. 予告なしに、品質・性能・改善のため寸法を変更する事があります。