




さし込み溶接形カップリング, キャップ
SOCKET-WELDING COUPLINGS, CAPS

SWC (COUPLINGS)
SWCA (CAPS)

JIS B2316

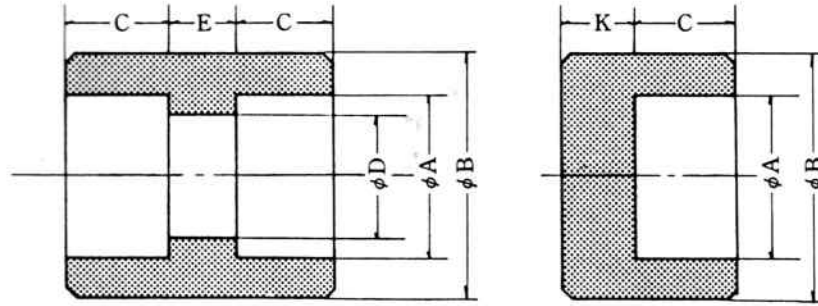

S W C

S W C A

※ S₈₀₋₆₅^A, 80^A, S₁₆₀ 全サイズ

UNIT : mm

NOM. SIZE		Sch 80						
(A)	(B)	B	A	D		C	E	K MIN.
				1 欄	※ 2 欄			
※ 6	1/8	19	11.0	7.1	5.7	12	6.4	3.5
8	1/4	22	14.3	9.4	7.8	12	6.4	4.5
10	3/8	28	17.8	12.7	10.9	13	6.4	5.0
15	1/2	32	22.2	16.1	14.3	13	9.5	6.1
20	3/4	38	27.7	21.4	19.4	16	9.5	7.0
25	1	46	34.5	27.2	25.0	17	12.7	8.3
32	1 1/4	58	43.2	35.5	32.9	18	12.7	9.6
40	1 1/2	63	49.1	41.2	38.4	20	12.7	10.5
50	2	76	61.1	52.7	49.5	23	19.1	12.2
65	2 1/2	96	77.1	65.9	62.3	26	19.1	15.3
80	3	108	90.0	78.1	73.9	29	19.1	17.3
NOM. SIZE		Sch 160						
(A)	(B)	B	A	D		C	E	K MIN.
15	1/2	38	22.2	12.3		15	9.5	7.2
20	3/4	46	27.7	16.2		16	9.5	8.8
25	1	58	34.5	21.2		18	12.7	10.6
32	1 1/4	63	43.2	29.9		20	12.7	11.8
40	1 1/2	76	49.1	34.4		21	12.7	13.3
50	2	96	61.1	43.1		24	19.1	16.4
※ 65	2 1/2	108	77.1	57.3		27	19.1	19.2
※ 80	3	128	90.0	66.9		31	19.1	22.5

※ 常備在庫ではありません。数量・納期により単価等異なりますので、別途御照会下さい。

ヤマト特殊鋼株式会社
YAMATO SPECIAL STEEL CO.,LTD.

Sheet No. JW-3