


アダプタ

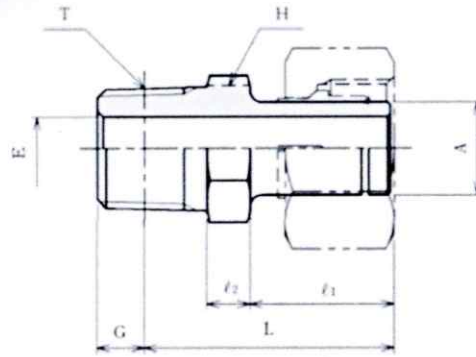

単位：mm

継手の呼び	適用管外径 A		(R) T	E	基準径の 位置 G	六角対辺 H	ℓ ₁	ℓ ₂	(約) L	重量 (kg)
	呼び径	外径								
KHA06-010E	6		1/8	3	3.97	12	21	5	32	0.013
KHA08-020E	8		1/4	5	6.01	14	21	6	35	0.024
KHA10-020E	10		1/4	6	6.01	14	22	6	36	0.026
KHA10-030E	10		3/8	6	6.35	19	22	6	36.5	0.044
KHA12-020E	12		1/4	7	6.01	14	22.5	6.5	37	0.029
KHA12-030E	12		3/8	8	6.35	19	22.5	6.5	37.5	0.042
KHA15-030E	15		3/8	8	6.35	19	24.5	7.5	40.5	0.058
KHA15-040E	15		1/2	10	8.16	22	24.5	7.5	43	0.075
KHA16-030E	16		3/8	9	6.35	19	24.5	7.5	40.5	0.051
KHA16-040E	16		1/2	11	8.16	22	24.5	7.5	43	0.073
KHA18-040E	18		1/2	12	8.16	22	24.5	7.5	43	0.076
KHA20-040E	20		1/2	12	8.16	24	26	7	44	0.083
KHA20-060E	20		3/4	14	9.53	27	26	9	46.5	0.128
KHA22-060E	22		3/4	14	9.53	27	27	9	47.5	0.142
KHA25-060E	25		3/4	16	9.53	27	29.5	8.5	49.5	0.133
KHA25-080E	25		1	17	10.39	36	29.5	9.5	52.5	0.246
KHA28-080E	28		1	18	10.39	36	29.5	9.5	52.5	0.260
KHA30-080E	30		1	20	10.39	36	30.5	9.5	53.5	0.253
KHA30-100E	30		1 1/4	20	12.70	46	30.5	10.5	55	0.442
KHA35-100E	35		1 1/4	24	12.70	46	34	11	59	0.362
KHA38-120N	38		1 1/2	26	12.70	50	36	14	64.5	0.600
KHA40-120N	40		1 1/2	28	12.70	50	36	14	64	0.583
KHA50-160N	50		2	34	15.88	65	37	20	72	1.168
KHA11-020N	1/8	10.5	1/4	6	6.01	14	21	7	36	0.027
KHA13-030N	1/4	13.8	3/8	9	6.35	19	22	8	38.5	0.046
KHA17-040N	3/8	17.3	1/2	11	8.16	22	24	8	43	0.080
KHA21-060N	1/2	21.7	3/4	14	9.53	27	26	10	47.5	0.140
KHA27-080N	3/4	27.2	1	18	10.39	36	28	11	52.5	0.252
KHA34-100N	1	34.0	1 1/4	23	12.70	46	33	12	59	0.449
KHA43-120N	1 1/4	42.7	1 1/2	29	12.70	50	36	17	67	0.641
KHA48-160N	1 1/2	48.6	2	33	15.88	65	37	20	72	1.173

注. 予告なしに、品質・性能・改善のため寸法を変更する事があります。